


ZMD-DT-SCN8

How do I playback video on my SCN4/8 OR SEN6 DVR?

This article will explain how to play back video that was previously recorded on the SCN series DVR.

Note: Navigating the DVR's menu system is most easily accomplished using the mouse that came with the DVR.


After having connected a monitor and your cameras to the DVR, and with it powered on, right click the mouse. You will see a toolbar at the bottom of the screen as shown below. Click on "Playback" and you will be prompted to log in. The DVR has no default password so you may just click log in if you have not changed it. After logging in right click your mouse one more time to return your toolbar along the bottom and select "Playback" one more time.

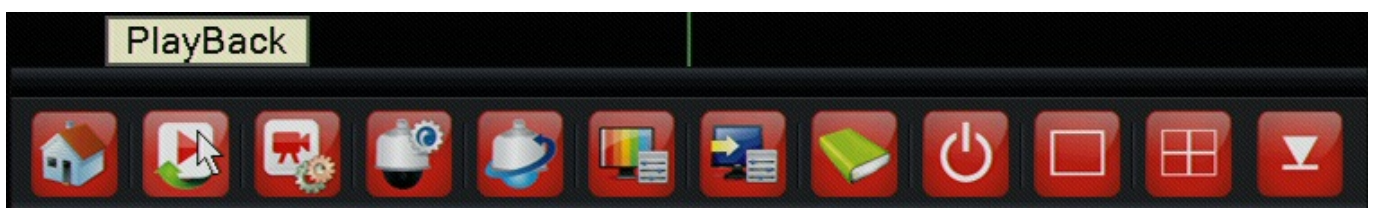

In the playback window that is now open you will first want to select which channels you would like to play back video from. They're listed in the lower right hand area. Any channel highlighted green will play video once this process is completed. After marking which channels you would like to view you will select the day you would like to view in the calendar above the channel selection as shown below. Days that have recordings on them will be a lighter shade of gray then days without. Just click on the day you want and lastly you will press the circling arrows in the lower right

ZMD-DT-SCN8

also indicated below.

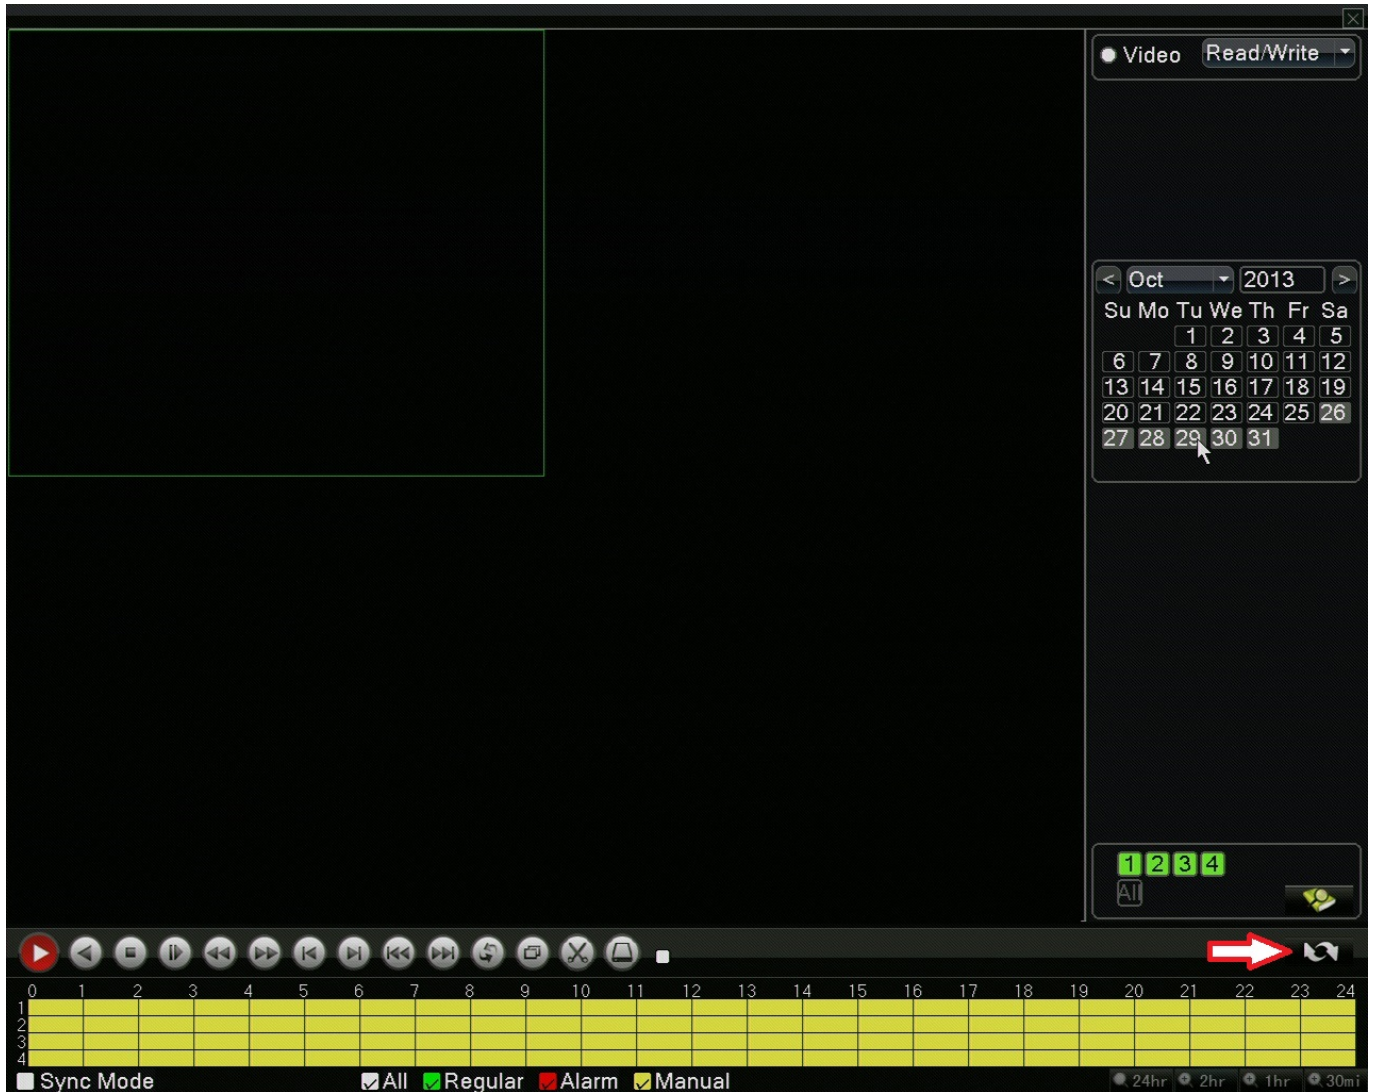

You will now have a timeline list of the days recordings. Just double click on the hour of the day or the motion recorded file you would like to view and it will begin playing in the screens to the left. You may repeat this process for any day you would like to view video for that has been recorded on the DVR.

ZMD-DT-SCN8

The screenshot displays the ZMD-DT-SCN8 software interface. The main window shows a video feed from CAM01, which is a close-up of a brick wall. The timestamp '2013-10-29 04:00:04' is visible in the top left corner of the video feed. Below the video feed, there are labels for CAM02, CAM03, and CAM04. The right side of the interface features a 'StartTime Type' list with a vertical scrollbar, showing a range of times from 00:00:00 H to 22:00:00 H. The '04:00:00 H' entry is highlighted in red. Below this list, there is a section for 'Start Time', 'End Time', and 'Size(KB)'. The 'Start Time' is '13-10-29 04:00:00', the 'End Time' is '13-10-29 05:00:00', and the 'Size(KB)' is '711184'. At the bottom of the interface, there is a timeline with a play button and a list of events. The events are listed in a table with columns for time and event type. The events are: 04:00:04, 04:00:04, 04:00:04, and 04:00:04. The bottom of the interface also includes a 'Sync Mode' checkbox and a list of filters: All, Regular, Alarm, and Manual. The bottom right corner shows a time range selector with options for 24hr, 2hr, 1hr, and 30m.

Time	Event Type
04:00:04	Regular
04:00:04	Regular
04:00:04	Regular
04:00:04	Regular

Unique solution ID: #1266
Author: Alex Crewell
Last update: 2013-12-03 17:28