

# ZP-KB1104-W


## NVR Setup Guide

# ZP-KB1I04-W

# ZP-KB1104-W



# ZP-KB1104-W

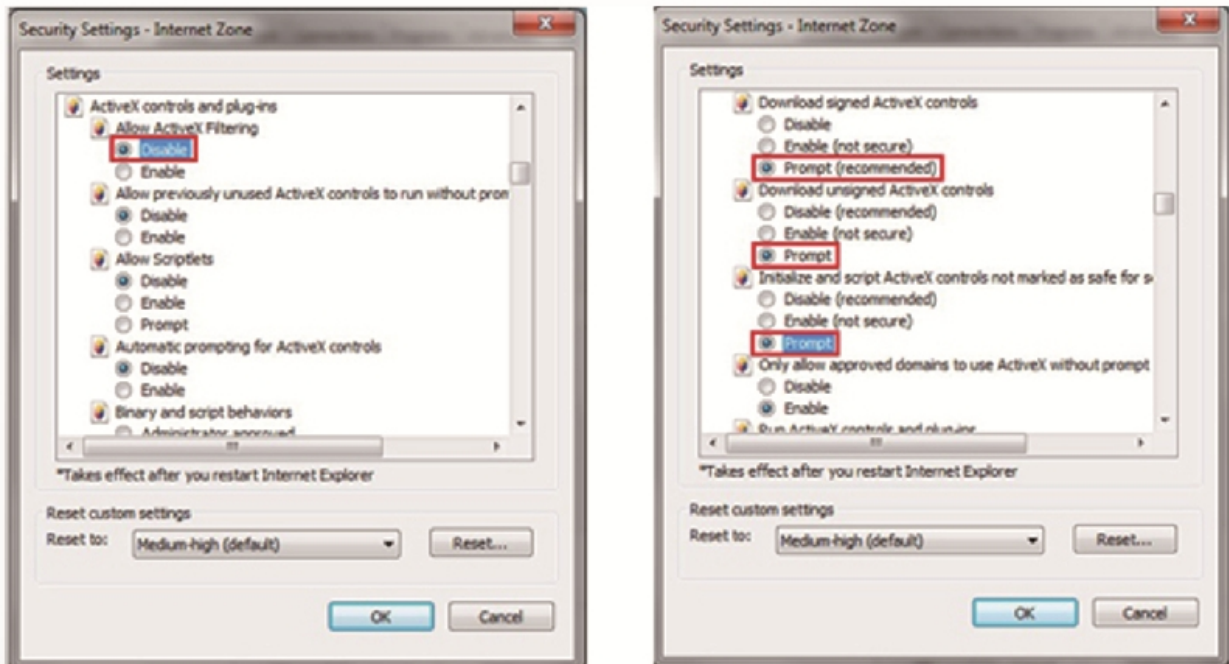

Click **Save**, then click the red X to exit out of the IPC Config menu.

6. Next, open an Internet Explorer browser and test this camera's connection. Type the IP Address as it appears in the IP field in the IPC Config menu into an Internet Explorer browser, including **http://** at the front of the IP Address. The address that you type into the Internet Explorer browser should look similar to this: **http://192.168.1.140**

7. When Internet Explorer prompts you to allow add-ons, click **Allow** to run the necessary ActiveX controls.

8. If you see a **Internet Explorer cannot display the webpage** error, please repeat steps 4 - 6 and try entering a different set of three digits in the last segment of the IP Address when you save a new address in the **IP** field. If the browser loads for more than two minutes without arriving to a webpage, please open a new tab in Internet Explorer and try entering in the same IP Address in the address bar of the new tab. (Default username is **admin**, Default password is 111111)

9. Once you have established a wired connection and can view the camera from Internet Explorer, double click on the IP Camera that you just saved networking settings on, and click on the "Wifi" tab. Select the check box to enable Wi-Fi. Next, manually set the **IP Addr** field, **Subnet Mask** field, and **Gateway** field to match the settings that appear in the Networking tab of the IPC Config menu.

# ZP-KB1104-W

The screenshot shows the 'IPC Config' window with the 'Networking' tab selected. Under the 'WIFI' sub-tab, there are several configuration options:

- Whether to use WIFI:
- Whether to use DHCP:
- IP Addr: 192 . 168 . 1 . 211
- Subnet Mask: 255 . 255 . 255 . 0
- Gateway: 192 . 168 . 1 . 1
- MAC: 7C:DD:90:18:CE:9E
- Main DNS Server: 202 . 96 . 134 . 133
- Minor DNS Server: 8 . 8 . 8 . 8

A 'Submit' button is located to the right of these fields. Below the configuration fields is a section titled 'List of wireless network' containing a table with the following data:

Name	Connection status	Signal strength	Encrypt
CMCC-AUTO	Disconnected	69%	Encrypted
peytontest	Disconnected	84%	Encrypted
zmodoem	Disconnected	67%	Encrypted
zmodo123456	Disconnected	74%	Encrypted
SMC-Conference	Disconnected	70%	Encrypted
DWZQ	Disconnected	68%	Encrypted

To the right of the table are 'Add' and 'Refresh' buttons.

10. Click "Refresh" and a list of available Wifi networks will appear in the list. Double click the name of the Wifi network to enter the WIFI Wireless Network Settings menu. From this menu, enter your Wifi password and click "Establish Connection."

The screenshot shows the 'WIFI Wireless Network Settings' window. It contains the following fields and options:

- Wireless Network: zmodoem
- Authentication Mode: WPA2 PSK Encrypted
- WEP Index: WEP key 1
- Key Format: ASCII
- Password: (empty field)

At the bottom of the window are two buttons: 'Establish Connection' and 'Exit'.









# ZP-KB1104-W

\*\* If You Need Any Software For the NVR, Including the Search Tool, please visit  
<http://files.zmodo.com/Software%20Files/NVR%20Tools/>\*\*

<http://files.zmodo.com/Software%20Files/PC%20Viewing%20Software/NVRs/>

Unique solution ID: #1016

Author: Patricia Pyle

Last update: 2013-08-15 21:47