

# CM-T1001BG PTZ Camera settings

## PTZ Camera settings

Connecting the Camera(s)

### Requirements and Tips for PT/PTZ Cameras

**PT/PTZ Cameras require more power than standard fixed cameras (600mA+). Use separate power source.**

**Use:**




**3 Amp/5 Amp  
Adapter**

**Don't  
Use:**



**(Power Box only puts out  
500mA per terminal)**

# CM-T1001BG

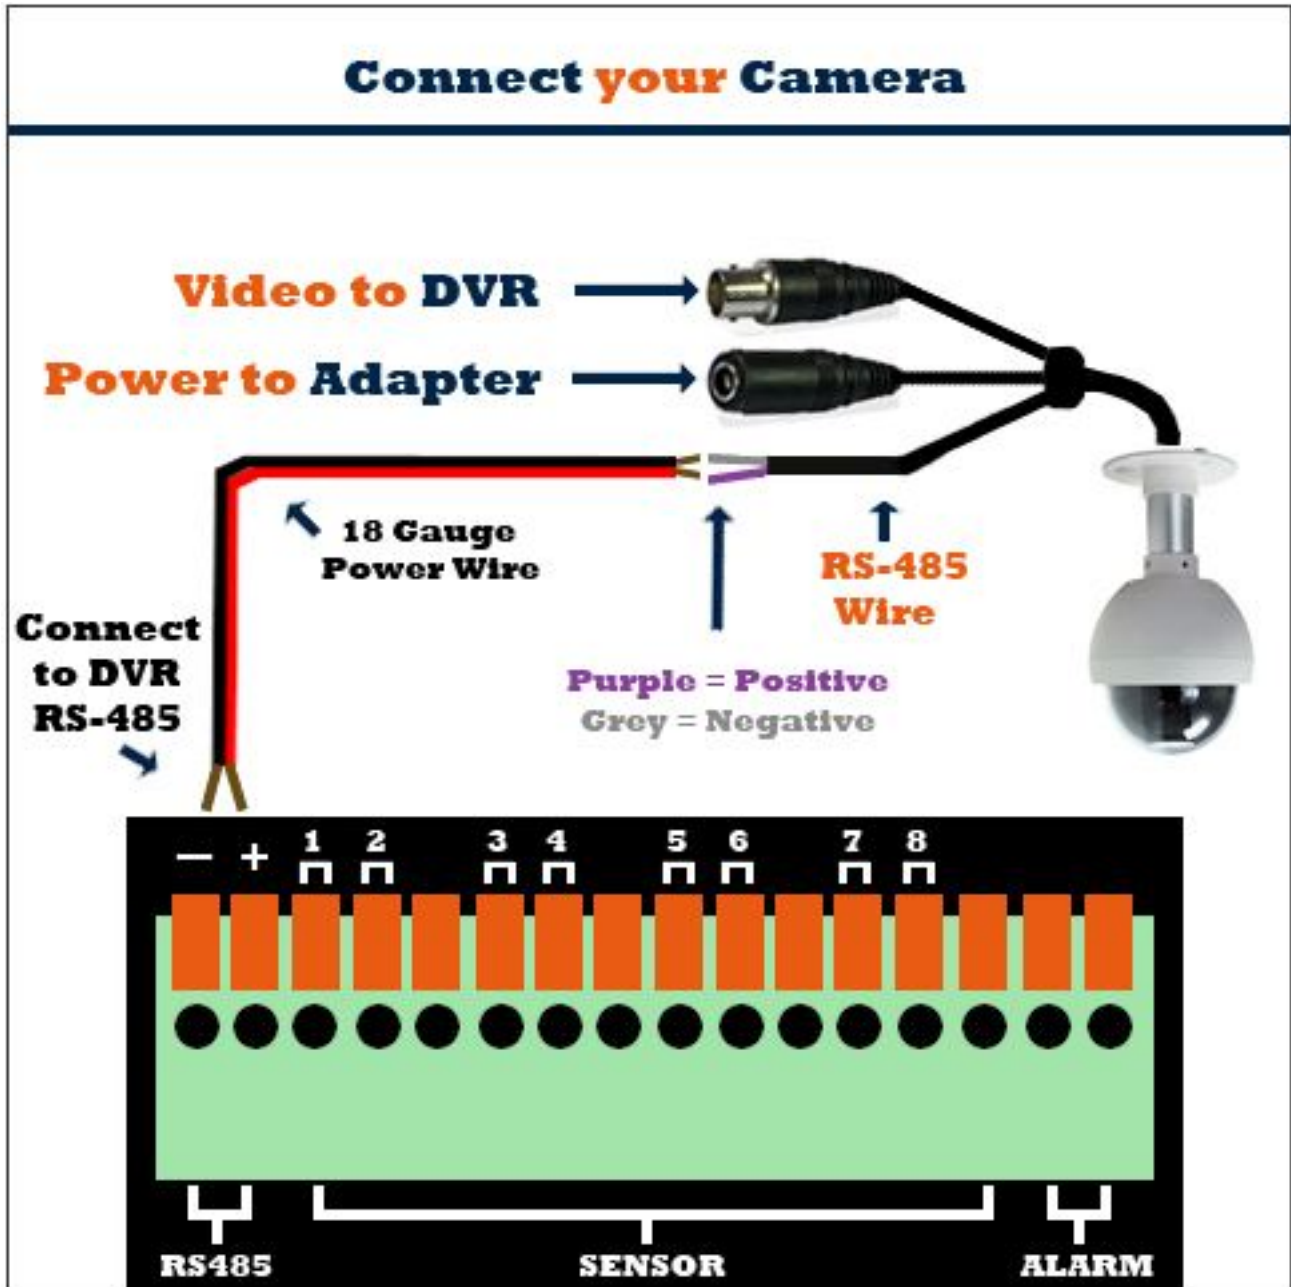

T1001bg

# CM-T1001BG



All settings are Protocol pelco D and Baudrate 2400.

Camera 1

Turn on switch 1 and 10 all others off

Camera 2

Turn on switch 2 and 10 all others off

Camera 3

Turn on switch 1, 2 and 10 all others off

Camera 4

Turn on switch 3 and 10 all others off

Camera 5

Turn on switch 1, 3 and 10 all others off

Camera 6

Turn on switch 2, 3 and 10 all others off

Camera 7

# CM-T1001BG

Turn on switch 1, 2, 3 and 10 all others off

Camera 8

Turn on switch 4 and 10 all others off

## T1002bg



All settings are Protocol pelco D and Baudrate 2400.

Camera 1

Turn on switch 1 all others off

Camera 2

Turn on switch 2 all others off

Camera 3

Turn on switch 1 and 2 all others off

Camera 4

Turn on switch 3 all others off

# CM-T1001BG

Camera 5

Turn on switch 1 and 3 all others off

Camera 6

Turn on switch 2 and 3 all others off

Camera 7

Turn on switch 1, 2 and 3 all others off

Camera 8

Turn on switch 4 all others off

## Z2110BG

If the smaller row of 4 dipswitches are all down then the settings are Protocol pelco D and Baudrate 2400. The only thing you are going to change is the larger row of 8 dipswitches to change the address.

Camera 1

Turn on switch 1 all others off

Camera 2

Turn on switch 2 all others off

Camera 3

Turn on switch 1 and 2 all others off

Camera 4

Turn on switch 3 all others off

Camera 5

Turn on switch 1 and 3 all others off

Camera 6

Turn on switch 2 and 3 all others off

Camera 7

# CM-T1001BG

Turn on switch 1, 2 and 3 all others off

Camera 8

Turn on switch 4 all others off

## Z2212GY

If the smaller row of 4 dipswitches are all down then the settings are Protocol pelco D and Baudrate 2400. The only thing you are going to change is the larger row of 8 dipswitches to change the address.

Camera 1

Turn on switch 1 all others off

Camera 2

Turn on switch 2 all others off

Camera 3

Turn on switch 1 and 2 all others off

Camera 4

Turn on switch 3 all others off

Camera 5

Turn on switch 1 and 3 all others off

Camera 6

Turn on switch 2 and 3 all others off

Camera 7

Turn on switch 1, 2 and 3 all others off

Camera 8

Turn on switch 4 all others off

Unique solution ID: #1120

Author: Alex Crewell

Last update: 2013-08-20 19:35