

NVR and IP Cameras

ZMODO Zviewer iOS Mobile Application

Instructions

ZMODO Zviewer for iOS

1. Software Installation

1.1 Introduction

Zviewer for iOS is the mobile app used to stream live video from your ZMODO H.264 DVR or IP Network camera, and supports a four channel simultaneous view. This guide focuses on the installation and use of the application.

1.2 Requirements

Hardware: iPhone mobile phone or iPod touch

System: iOS 4.3 or higher

Network: WiFi or GPRS

1.3 Installation Steps

Enter the iTunes App Store and download the Zviewer application.

2. Operation Instructions

2.1 Opening Program

Locate the Zviewer application and tap to launch. Once the application loads, you will see the main interface.

NVR and IP Cameras



Start

2.2 Managing Device

From the main interface, tap the SETTING button on the bottom left corner of the toolbar, and select Device manage (See Setting) to enter the device management interface (See Devices).

NVR and IP Cameras



NVR and IP Cameras



Setting Devices

1) **Add Device.** In the device management interface (See Devices), tap the "+" button on the toolbar to enter the Add Device interface (See Add). The SAVE button will be enabled once all the required items are entered. Tap SAVE to save and go back to the device management interface (See Devices).

NVR and IP Cameras



Device ID	Device 01
Adress	192.168.1.10
Device Port	8050
User Name	Admin
Password	Required
Channel Count	4
Current Channel	0
Description	Description

Add

2) **Delete device.** On the device management interface (See Devices), tap EDIT button on the toolbar or swipe one row of the list (See Delete 02) to delete a device.

NVR and IP Cameras



NVR and IP Cameras



Delete01 Delete02

3) **Revising device information.** From the device management interface (See Devices), tap the desired device, and make your changes (See Edit). Tap DONE on the toolbar to save, or tap DEVICES to exit without saving.

NVR and IP Cameras




Edit

2.3 Playing Video

1) Tap any square box; a red border will appear around the channel when chosen (See Select).

NVR and IP Cameras

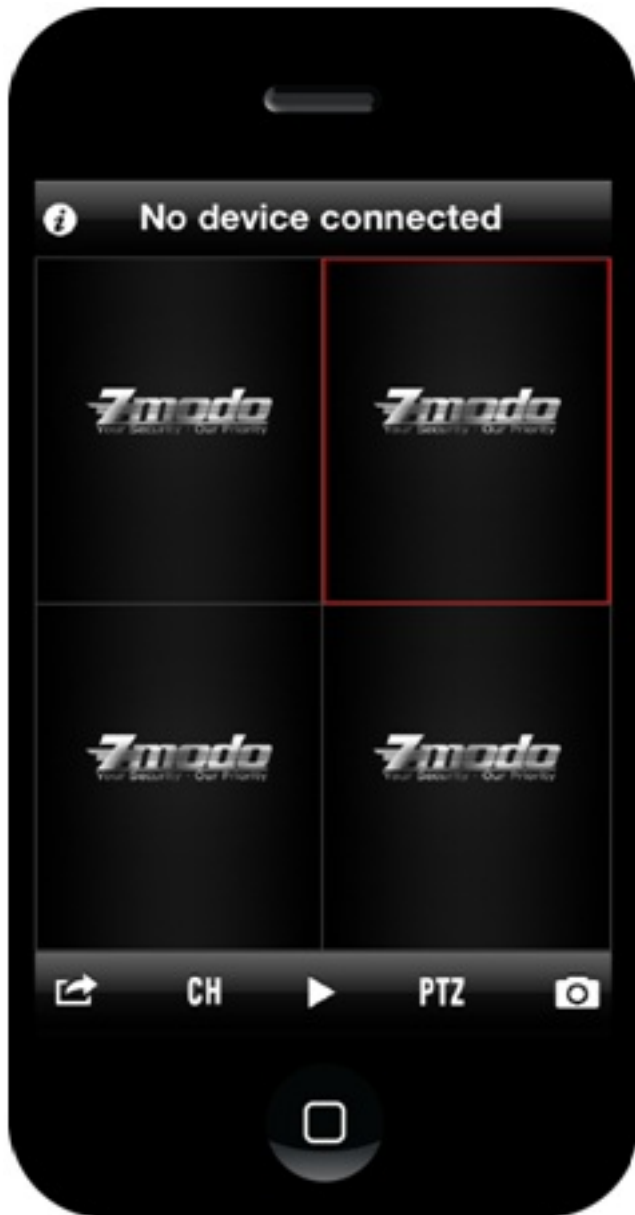

Select

2) Tap the PLAY button. If the channel's video player does not automatically connect to a device, you will see a pop-up requesting a device selection (See Select Device). Select desired device to connect.

NVR and IP Cameras



Select Device

3) From the Select Channel menu, tap the channel you would like to play (See Select Channel).


NVR and IP Cameras



Select Channel

4) If the device information is correct, your video will start playing (See Play).

NVR and IP Cameras

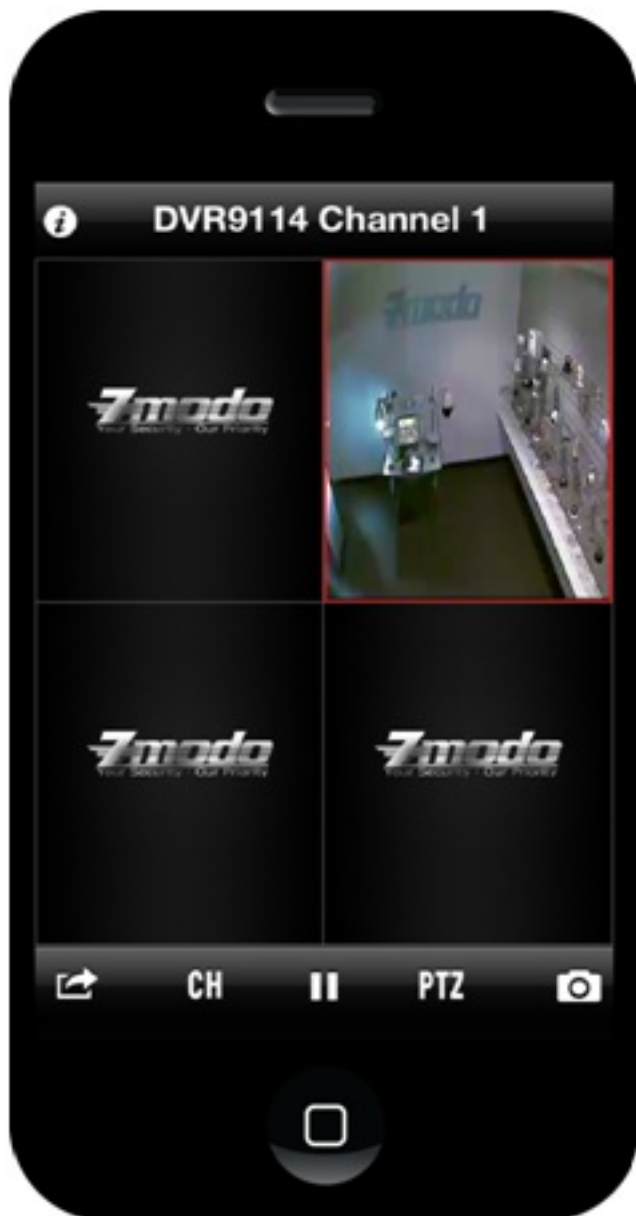

Play

2.4 Switching Devices

From the main interface, tap the SETTINGS button on the toolbar and select the Device Connect button (or long-press the channel's box) to enter the Select Device interface. The rest of the steps will be the same as listed under Section 2.3.

2.5 Switching Channels

NVR and IP Cameras

- 1) Tap on CH at the bottom of the toolbar to reveal the channel selection panel (See Channel 1);
- 2) Select the channel you would like to play by tapping it;
- 3) Tap CH again to hide the channel selection



NVR and IP Cameras



Channel 1 After Switch

2.6 Switching Display Modes

- 1) Double tap the video window to switch between single channel and four channel views;
- 2) To switch between Portrait and Landscape modes, orient your phone horizontally or vertically (See Portrait, Landscape).

NVR and IP Cameras



Portrait




NVR and IP Cameras

Landscape

2.7 PTZ Control

- 1) To reveal the PTZ toolbar, tap PTZ (See PTZ);
- 2) On the top row, the buttons from left to right signify: tilt up, pan left, zoom in, aperture increase, focal length increase. On the bottom row, the buttons from left to right signify: tilt down, pan right, zoom out, aperture decrease, focal length decrease;
- 3) To hide the PTZ toolbar, tap PTZ.

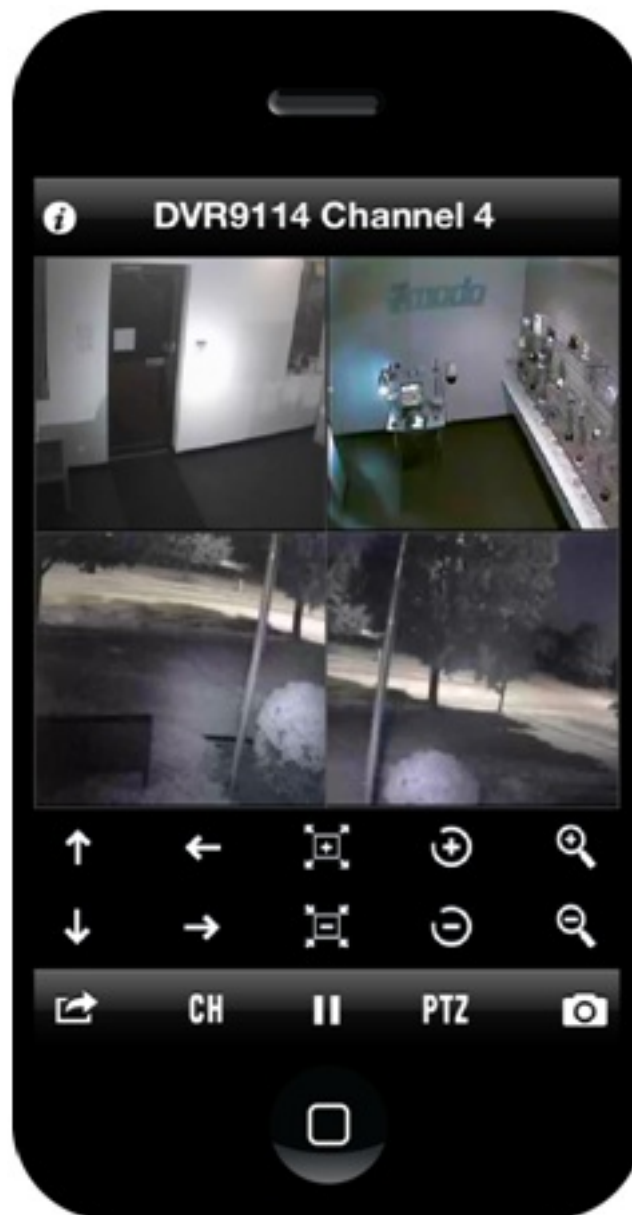

PTZ

2.8 Image Capture


Page 16 / 17

(c) 2024 Jeremy Schultz <itmanager@eptco.com> | 2024-04-24 01:43

URL: <https://kb.zmodo.com/index.php?action=artikel&cat=172&id=106&artlang=en>

NVR and IP Cameras

In portrait mode, select a channel, and tap the SCREENSHOT button on the bottom right corner of the toolbar. The file will save to the photo directory of the phone.

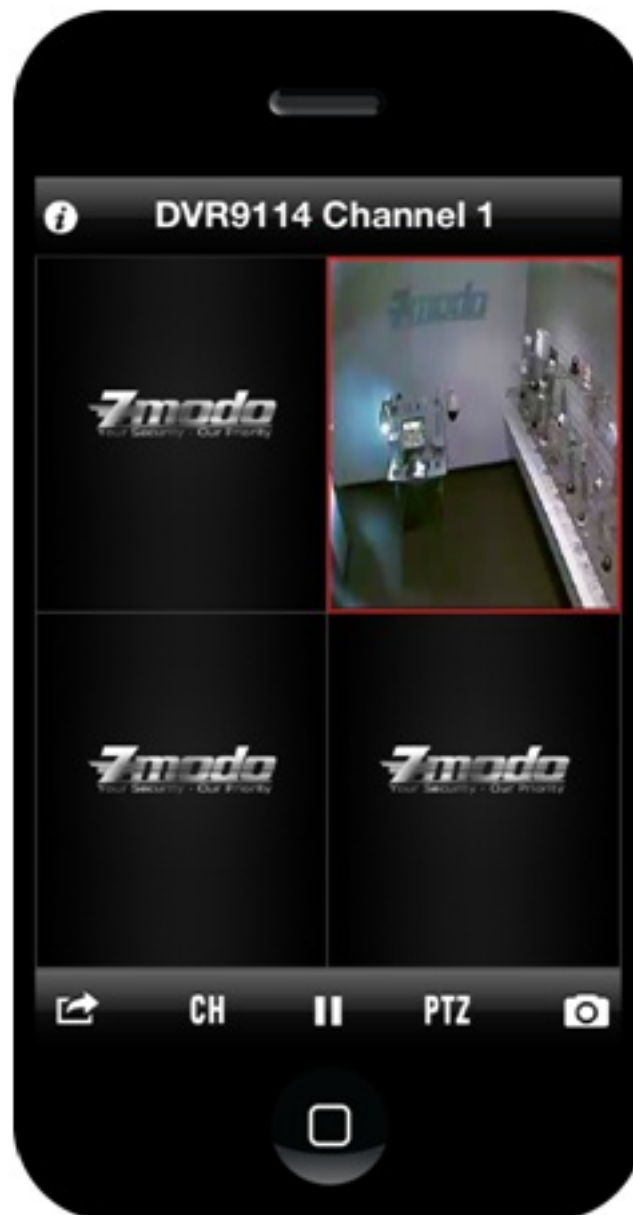

Capture

Unique solution ID: #1105
Author: Alex Crewell
Last update: 2014-04-11 10:17